
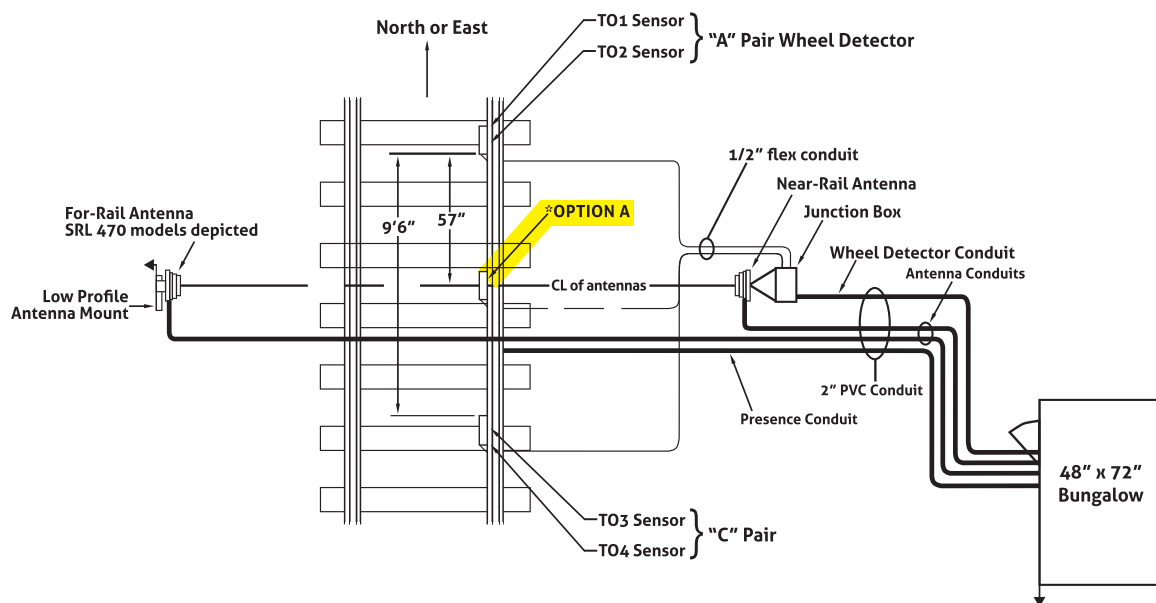


INSTALLATION SCHEMATIC AND BASIC SYSTEM COMPONENTS

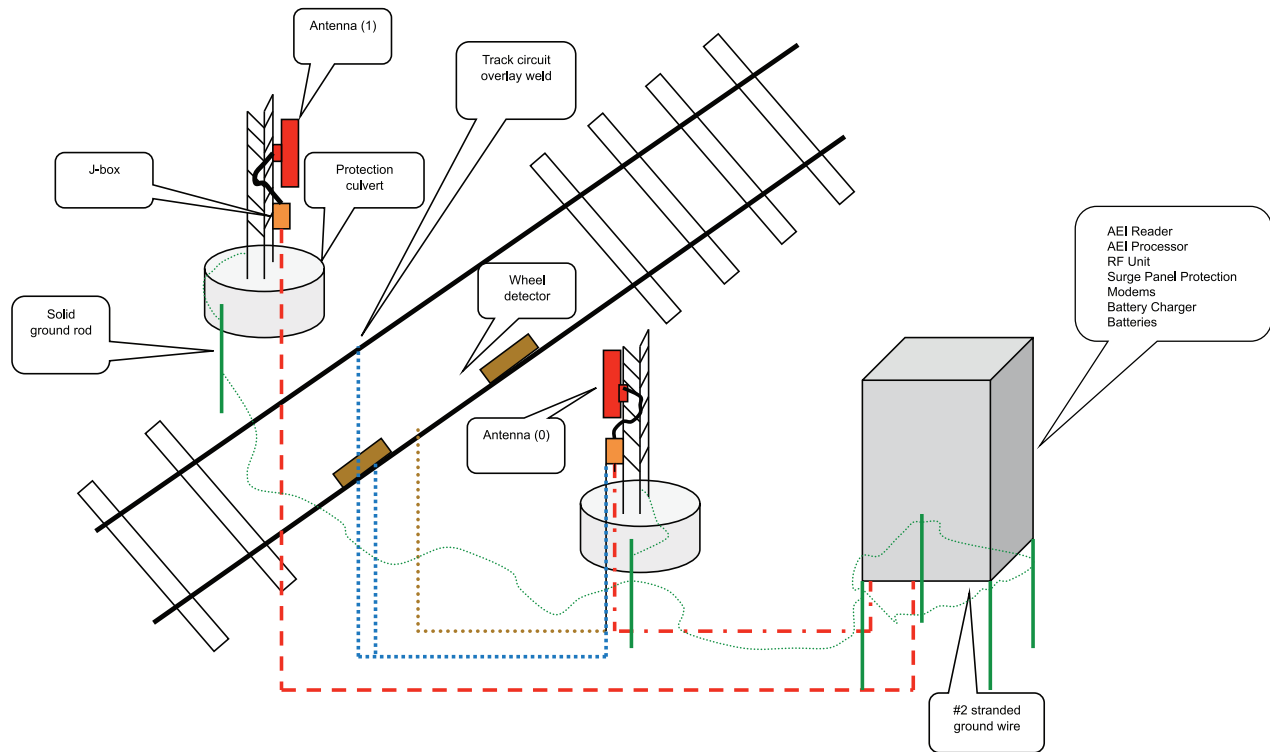

*OPTION A: For Straight Pull-Through Sites, A Single Dual-Element Detector May Be Used. Mounted Centerline Between Antennas